

±0.25% of RO

±0.25% of RO

±0.1% of RO

2 mV/V nom

≥500 MOhm @ 50 VDC

cable 10 ft (3 m) long

0.001 in [0.03 mm] nom

17-4 PH stainless-steel

-45 to 200°F (-42 to 93°C)

±0.005% of RO/°F (±0.01 of RO/°C)

±0.02% of load/°F (±0.036 of load/°C)

60 to 160°F (15 to 72°C)

1.5 oz [42.5 g]

150% of RO

#28 AWG, 4 conductor braided-shielded PVC

15 max 740 Ohm nom

WC1

IP64

10 VDC

5-pt Tension

Compression

100 kOhm

2011/65/EU



SPECIFICATIONS PERFORMANCE Nonlinearity

Hysteresis

Nonrepeatability

Rated Output (RO)

Bridge Resistance Insulation Resistance

Connection

MECHANICAL

Safe Overload

Material (flexure)

TEMPERATURE

CALIBRATION

CONFORMITY

RoHS

CE

Operating Temperature

Temperature Shift Zero

Temperature Shift Span

Calibration Test Excitation

Calibration (standard)

Calibration (available)

Shunt Calibration Value

Compensated Temperature

Deflection

IP Rating

Excitation (VDC or VAC)


Wiring/Connector Code


Weight (minus cable)

ELECTRICAL

FEATURES

- Minimal mounting clearance
- 17-4 PH stainless-steel construction
- For use in both tension and compression
- Utilizes metal foil strain gauge technology
- Adheres to RoHS directive 2011/65/EU
- Accessories and related instruments available

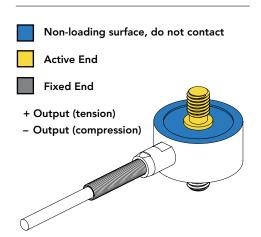



Sensor Solution Source Load · Torque · Pressure · Multi-Axis · Calibration · Instruments · Software










EN55011:2009; EN61326-1:2006




www.futek.com

Model LCM300

DIMENSIONS inches [mm]

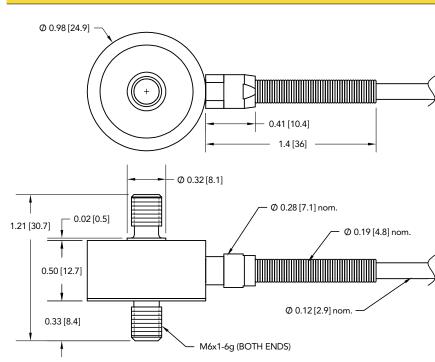

WIRING CODE (WC1 WITH SHIELD)				
RED	+ EXCITATION			
BLACK	– EXCITATION			
GREEN	+ SIGNAL			
WHITE	– SIGNAL			
SHIELD	FLOATING			

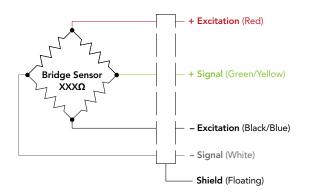

CAPACITIES			
ITEM #	lb	Ν	Natural Frequency (kHz)
FSH03884	50	223	7.5
FSH03885	100	445	10.2
FSH03886	250	1112	16.2
FSH03887	500	2224	22.9
FSH03888	1000	4448	30.1



Drawing Number: FI1059-F

FUTEK reserves the right to modify its design and specifications without notice. Please visit <u>http://www.futek.com/salesterms</u> for complete terms and conditions.

10 Thomas, Irvine, CA 92618 USA Tel: (949) 465-0900 Fax: (949) 465-0905





RØHS





りぐ

13485



2

www.futek.com