

Model Number 1053V3	PERFORMANCE SPECIFICATION	DOC NO PS1053V3
	DYNAMIC FORCE SENSOR	REV A, ECN 11034, 06/25/14



- COMPRESSIVE & TENSILE LOADINGS
- EXCELLENT LINEARITY

		ENGLIS	H	CI.		
		ENGLISH		SI		
PHYSICAL						
Weight, Max.		1.0	OZ	28	grams	
Connector		10-32		10-32		
Material		Stainless Steel		Stainless Steel		
Sensing Element	Material	Quartz		Quartz		
	Mode	Compression		Compression		
PERFORMANCE						
Sensitivity, ± 10 %		50	mV/lbf	11.2	mV/N	
Compression Range		100	lbf	444.8	N	
Maximum Compression		2,000	lbf	8896	N	
Tension Range		100	lbf	444.8	N	
Maximum Tension [1]		200	lbf	890	N	
Resolution		0.0014	lbf, rms	0.0062	N	
Linearity [2]		±1	% Full Scale	±1	% Full Scale	
Resonant Frequency, Unloaded		75	kHz	75	kHz	
Stiffness, Force Sensor		11.4	lbf/µin	2.0	kN/μm	
ENVIROMENTAL						
Maximum Shock, Unloaded		10,000	g pk	98100	m/s ²	
Maximum Vibration, Unloaded		5.000	g pk	49050	m/s ²	
Temperature Range		-100 to +250	°F	-73 to +121	°C	
Thermal Coefficient		0.03	%/°F	0.05	%/°C	
Seal		Epoxy		Epoxy		
			= !		- I	
ELECTRICAL						
Output Voltage F.S		±5	V	±5	V	
Output Impedance		<100	Ω	<100	Ω	
Bias Voltage		7.5 to 9.5	VDC	7.5 to 9.5	VDC	
Compliance Voltage Range		18 to 30	VDC	18 to 30	VDC	
Supply Current Range [3]		2 to 20	mA	2 to 20	mA	
Discharge Time Constant, Nom		500	Sec	500	Sec	
			=		=	

This family also includes:

Model	Sens. (mV/lbf)	Compression Range (lbf)	Max. Compression (lbf)	Tension Range (lbf)	Max. Tension (lbf)	T.C. (sec)	Resolution (lbf, RMS)
1053V1	500	10	200	10	200	50	0.00014
1053V2	100	50	1000	50	200	100	0.0007
1053V4	10	500	10000	200	200	2000	0.007
1053V5	5	1,000	15000	200	200	2000	0.014
1053V6	1	5,000	15000	200	200	2000	0.07

Refer to the performance specifications of the products in this family for detailed description.


Supplied Accessories:


- 1) Accredited calibration certificate (ISO 17025)
- 2) Model 6213 steel impact cap, Model 6562 10-32 mounting stud

Notes:

[1] Absolute maximum tension. Do not exceed in any case!

- [2] Percent of full scale or any lesser range, Zero based best-fit straight line method.
- [3] Do not apply power to this system without current limting, 20 mA MAX.To do so will destroy the integral IC amplifier
- [4] In the interest of constant product improvement, we reserve the right to change specifications without notice.

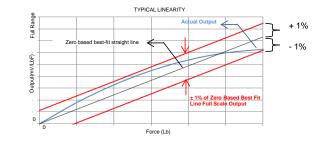

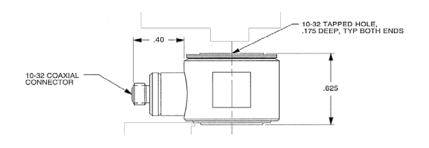

Units on the line drawing are in inches, units in brackets are in millimeters. Refer to 127-1053V for more information.

